


MR34V-GL

Glazed-in louver - 34 V blade



Type MR34V-GL	
TECHNICAL DETAILS	
Profile	Extruded alu profiles EN-AW-6060 T66 (AlMgSi0,5 F22)
Profile thickness	Min. 1.3 mm
Glazing thickness	24 mm
Height of the blade	38.5 mm
Blade pitch	34 mm
Rebate size	22 mm
Visual free area	60%
Physical free area	50%
Stainless steel mesh	AISI 304 with apertures 2.3 x 2.3 mm
Reinforcement	Louvers wider than 700 mm are provided with a reinforcement profile carrying additional blade supports to strengthen the wide louver
FIXATION	
With glazing beads. Use glazing blocks	
SHAPES	
Rectangular, square	

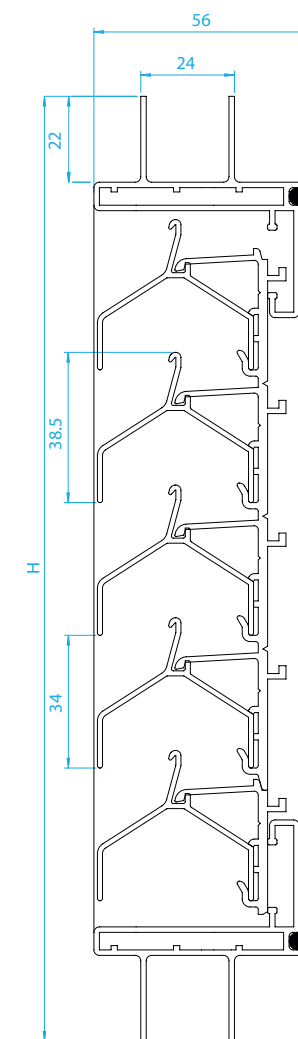

GL