


MR50Z-FL

Flanged wall louver - 50 Z blade



Type MR50Z-FL	
TECHNICAL DETAILS	
Profile	Extruded alu profiles EN-AW-6060 T66 (AlMgSi0,5 F22)
Profile thickness	Min. 1.4 mm
Height of the blade	67 mm
Blade pitch	50 mm
Depth to fit	63 mm
Flange depth	33.8 mm
Visual free area	78%
Physical free area	48%
Stainless steel mesh	AISI 304 with apertures 2.3 x 2.3 mm
Reinforcement	Louvers wider than 700 mm are provided with a reinforcement profile carrying additional blade supports to strengthen the wide louver
FIXATION	
Brackets : supplied as standard	
SHAPES	
Rectangular, square	

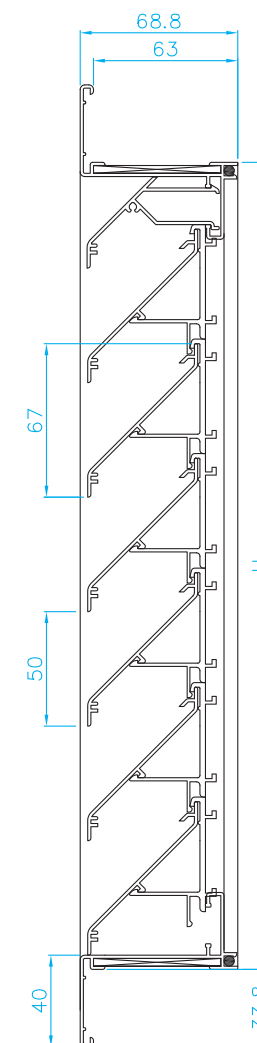

FL