


MR34Z-GL HIGH FLOW

Glazed-in louver - 34Z blade

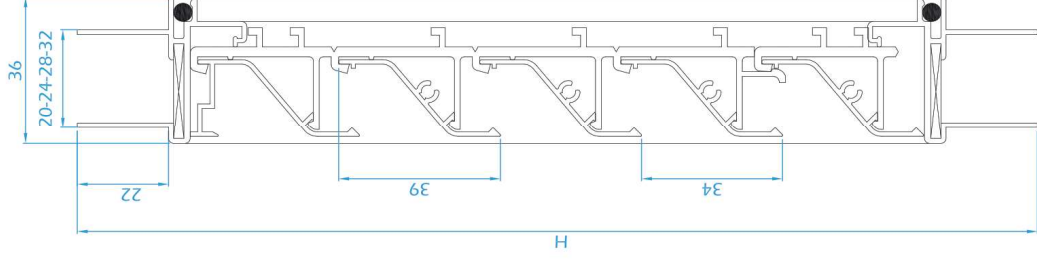

Type MR34Z-GL HIGH FLOW	
TECHNICAL DETAILS	
Profile	Extruded alu profiles EN-AW-6060 T66 (AlMgSi0,5 F22)
Profile thickness	Min. 1.1 mm
Height of the blade	39 mm
Blade pitch	34 mm
Rebate size	22 mm
Glazing thickness	20, 24, 28 and 32 mm
Visual free area	68%
Physical free area	48%
Stainless steel mesh	(AISI 304) with apertures 2.3 x 2.3 mm
Reinforcement	Louvres wider than 700 mm are provided with a reinforcement profile carrying additional blade supports to strengthen the wide louvre
FIXATION	
With glazing beads. Use glazing blocks	
SHAPES	
Rectangular, square	

GL